

Fireriser® Bronze Gate Valve

OS&Y, Threaded

Fig No.:BGV




Working Pressure:

175 PSI NON – SHOCK COLD WATER (400 PSI NON-SHOCK CWP GENERAL SERVICE)



Materials List

No.	Name	Material
1	Body	Bronze ASTM C83600
2	Bonnet	Bronze ASTM C83600
3	Stem	Brass
4	Hand Wheel	Cast Iron
5	Packing Gland	Bronze ASTM C83600
6	Disc	Bronze ASTM C83600
7	Disc Pin	SS304
8	Gland Packing	Graphite
9	Stud	Steel
10	Yoke Bushing	Brass
11	Set Screw	Steel

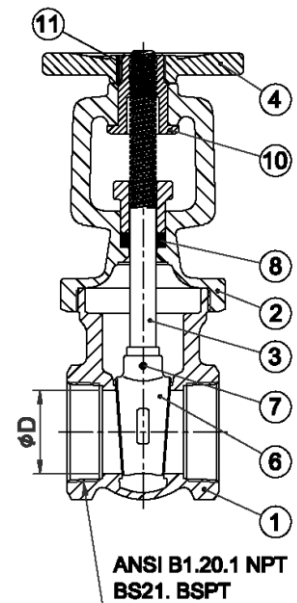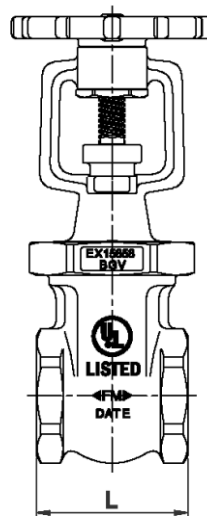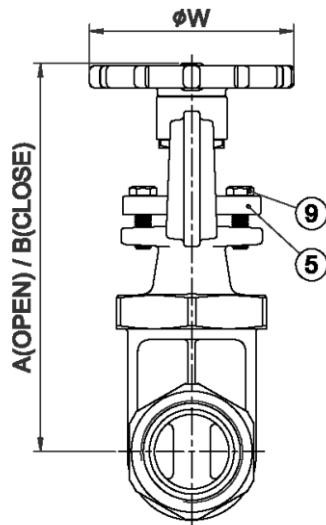

Dimensions(mm):

Size	A±3	B±3	L±0.5	D	W±3
3/4"	173	145.5	59	20	80
1"	196.5	163	69	25	80
1-1/4"	220.5	181.5	75	32	80
1-1/2"	243	197	82	37.5	100
2"	282	227	90.5	50	120