

NRS GATE VALVE

BRAND	:	FIVALCO
MANUFACTURER	:	FIVALCO INC.
MODEL	:	3288-LI-300-FLA
TYPE	:	NON-RISING STEM
APPROVED	:	UL/FM
SIZE	:	2 ½", 3", 4", 6", 8", 10", 12"
CONNECTION	:	FLANGED ENDS
PRESSURE	:	300 PSI. WKP.

MATERIAL LIST

BODY&BONNET	:	DUCTILE IRON
WEDGE	:	DUCTILE IRON W / EPDM COATED
STEM	:	STAINLESS STEEL

Fireriser® Gate Valve

Resilient Seated-300PSI- NRS Type Flanged Ends

Fig No.:3288-LI-300-FLA

Valve Standard:

Conforms to AWWA C515 / BS5163

Working pressure:

21 BARS / 300PSI

Temperature: from -10°C to 120°C


Fusion bonded epoxy coated interior and exterior RAL3002

Flanged Ends:

ANSI B16.1 Class 125/ANSI B16.5 Class 150, EN1092-2 PN16

BS10 Table D/Table E

Stainless Steel Stem

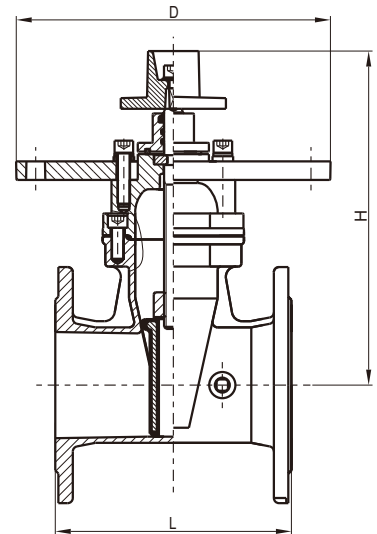

Materials List

Name	Material
Body	Ductile Iron ASTM A536 65-45-12
Wedge Disc	Ductile Iron ASTM A536 65-45-12 +EPDM
Disc Nut	Bronze ASTM B62
Stem	Stainless Steel AISI304/420
Gasket	EPDM
Bonnet	Ductile Iron ASTM A536 65-45-12
Thrust Collar	Bronze ASTM B62
Gland	Ductile Iron ASTM A536 65-45-12
Wrench Nut	Ductile Iron ASTM A536 65-45-12
Post Plate	Ductile Iron ASTM A536 65-45-12

Dimensions(inch/mm):

Size	2"/50	2.5"/65	3"/80	4"/100	5"/125	6"/150	8"/200	10"/250	12"/300
L	7.00/178	7.5/191	8.00/203	9.00/229	10.00/254	10.50/267	11.50/292	13.00/330	14.00/356
H	10.98/279	10.98/279	11.99/304.50	12.76/324	15.49/393.50	16.85/428	21.14/537	25.20/640	28.46/723
D	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305	12.01/305

Net Weight (kg) and Crate Qty (pcs)

Size	2"/50	2.5"/65	3"/80	4"/100	5"/125	6"/150	8"/200	10"/250	12"/300
N.W.	24.00	25.30	27.50	35.00	42.00	50.00	83.00	123.50	175.50
Crate Qty	9	9	9	9	9	9	9	4	2

Notes:

- Valve is rated at 300PSI for Fire Protection Service.
- Design and materials are subject to change without notice.
- All valves provided with 2"(50mm) operating nut.

Fivalco® and Fireriser® are Registered Trade Marks

Copyright Fivalco 2000